


Built-In Load Indicator ART-400






Revisión 01 | Reviewed by JN

airpes®

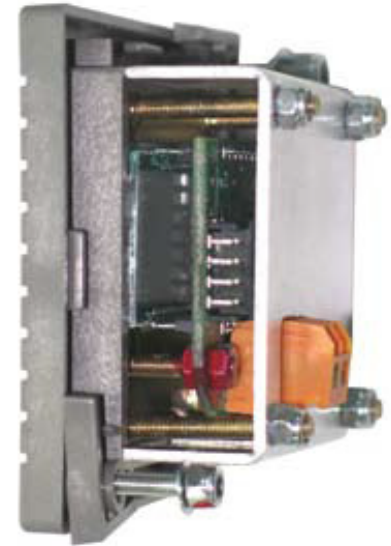

Mechanized panel

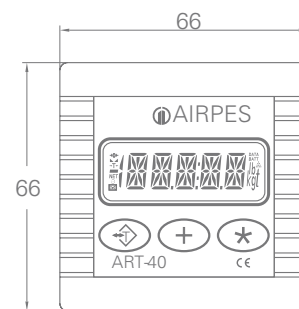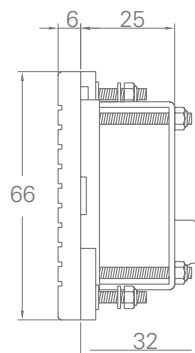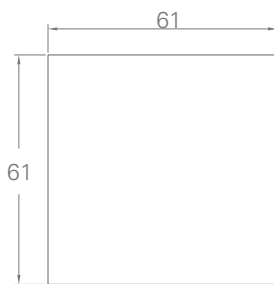

General information

The ART-40 built-in load indicator has been designed to be built-in in control panels, desks, etc. The ART-40 is a repeater of very easy installation (by means of 2 wires without polarity and without need of feeding), it can receive the information from whichever of our visors, various repeaters can be installed in parallel in the same line, each one of them to receive the weight of the bi-scale or multiscale devices.

The ART-40 has different options, like the incorporation of tare, summing memory, total, etc.

Characteristics

Digits: 6 LCD 0.4"

Work temperature: -20°C + 60°C

Functions: On/Off, Zero, Tare, Sum, Total and Erase

Protection: IP 55 (optional IP 65)

Connection: By means of 2 wires without polarity